McKESSON Canada

Canister Cleaning Procedure

Procédure de nettoyage de cassette

It is important to perform maintenance on your canister when necessary.

To do so, you will need the canister and the tool provided with your initial order, which allows the removal of the crowns.

Steps to follow:

1. **Remove the canister cover** by applying a slight twisting motion to release it.

2. **Turn the canister over.** Place the tool onto the crown tip, then press to release it. Use an object to push the crown completely out of the base of the cassette.

3. **Clean and dry your canister using only room-temperature water**. Ensure it is completely dry before reassembling it. This step is safe for the cassette's chip or RFID.
4. **Reinsert the crown into its slot** and ensure it is fully pushed in.

5. **Turn the canister back over** and check that the crown rotates normally. To do this, press the locking tab and manually rotate the crown.



6. **Reinstall the cover** by positioning the front first to align it, then press down the back to snap it securely into place. Ensure that the cover is properly attached.

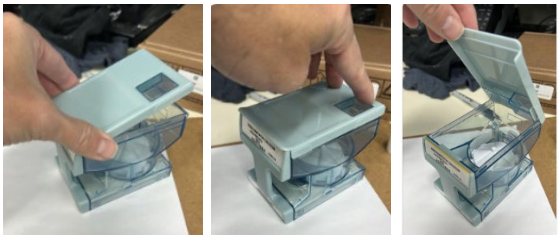

Il est important de faire l'entretien de vos cassettes lorsque nécessaire.

Pour ce faire, vous aurez besoin de votre cassette et l'outil fourni avec votre commande initiale, permettant de retirer les couronnes

Étapes à suivre :

1. **Retirer le couvercle** de votre cassette en effectuant une légère torsion pour le dégager.

2. **Retourner la cassette**. Placez l'outil sur l'embout de la couronne, puis appuyez pour la dégager. Utilisez un objet pour pousser complètement la couronne hors de la base de la cassette.



3. **Nettoyer et sécher la cassette**, simplement avec de l'eau température ambiante. Assurez-vous qu'elle soit complètement sèche avant de la réassembler. Cette étape est sécuritaire pour la puce ou RFID de votre cassette.
4. **Remettre la couronne dans son emplacement** et vous assurer qu'elle est bien poussée jusqu'au fond.

5. **Retourner la cassette** et vérifier que la couronne tourne normalement. Pour ce faire, pressez le cran d'arrêt et faites tourner la couronne manuellement.


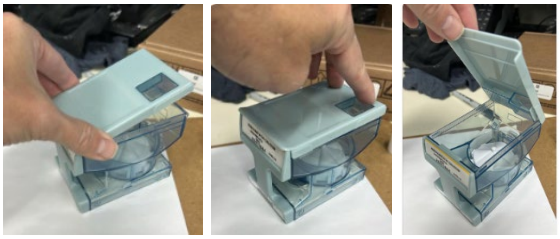
6. **Replacer le couvercle** en avant en premier pour l'aligner et presser le derrière par la suite pour l'enclencher correctement. Assurez-vous que le couvercle tient comme il faut.